


# EX30

- Spectrum™ 机用丝锥

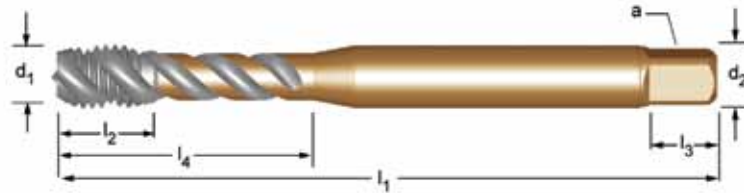

**NEW**

2010.09

spectrum™

DIN

## EX30

UNF HSS XS1 Gold DIN 2184-1 ↻ ↕ 2B 2.5xD C 2-3 45°

- 1.1 1.2 1.3 1.4 1.5 7.1 7.2 7.3 7.4
- 4.1 4.2 5.1 5.2

UNF	TPI	d <sub>1</sub> nom mm	l <sub>1</sub> mm	l <sub>2</sub> mm	d <sub>2</sub> ∅ mm	a mm	l <sub>3</sub> mm	z	↔	l <sub>4</sub> mm	e-Code
8	36	4.166	63	7	4.5	3.4	8	3	3.5	21	EX308-36
10	32	4.826	70	8	6.0	4.9	8	3	4.1	25	EX3010-32
1/4	28	6.350	80	10	7.0	5.5	8	3	5.5	30	EX301/4
5/16	24	7.938	90	12	8.0	6.2	9	3	6.9	35	EX305/16
3/8	24	9.525	100	15	10.0	8.0	11	3	8.5	39	EX303/8
7/16	20	11.112	100	15	8.0	6.2	9	3	9.9		EX307/16
1/2	20	12.700	110	18	9.0	7.0	10	3	11.5		EX301/2
5/8	18	15.875	110	20	12.0	9.0	12	4	14.5		EX305/8
3/4	16	19.050	125	25	14.0	11.0	14	4	17.5		EX303/4 <sup>1)</sup>
7/8	14	22.225	140	25	18.0	14.5	17	4	20.4		EX307/8 <sup>1)</sup>
1	12	25.400	160	30	18.0	14.5	17	4	23.25		EX301 <sup>1)</sup>

<sup>1)</sup> HSCo